

6-port unmanaged Ethernet switches with 4 IEEE 802.3af/at PoE+ ports



Features and Benefits

- IEEE 802.3af/at compliant PoE and Ethernet combo ports
- Up to 30 W output per PoE port
- 12/24/48 VDC redundant power inputs
- Intelligent power consumption detection and classification
- Redundant dual VDC power inputs
- -40 to 75°C operating temperature range (-T models)

Certifications



Introduction

The EDS-P206A-4PoE switches are smart, 6-port, unmanaged Ethernet switches supporting PoE (Power-over-Ethernet) on ports 1 to 4. The switches are classified as power source equipment (PSE), and when used in this way, the EDS-P206A-4PoE switches enable centralization of the power supply and provide up to 30 watts of power per port.

The switches can be used to power IEEE 802.3af/at-compliant powered devices (PD), eliminating the need for additional wiring, and support IEEE 802.3/802.3u/802.3x with 10/100M, full/half-duplex, MDI/MDI-X auto-sensing to provide an economical solution for your industrial Ethernet network.

Specifications

Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	EDS-P206A-4PoE Series: 2 EDS-P206A-4PoE-M-SC/M-ST/S-SC Series: 1 Supported functions: Auto negotiation speed Full/Half duplex mode Auto MDI/MDI-X connection
100BaseFX Ports (multi-mode SC connector)	EDS-P206A-4PoE-M-SC Series: 1 EDS-P206A-4PoE-MM-SC Series: 2
100BaseFX Ports (multi-mode ST connector)	EDS-P206A-4PoE-M-ST Series: 1 EDS-P206A-4PoE-MM-ST Series: 2
100BaseFX Ports (single-mode SC connector)	EDS-P206A-4PoE-S-SC/P206A-4PoE-S-SC-T: 1 EDS-P206A-4PoE-SS-SC/P206A-4PoE-SS-SC-T: 2
PoE Ports (10/100BaseT(X), RJ45 connector)	4
Standards	IEEE 802.3 for 10BaseT IEEE 802.3af/at for PoE/PoE+ output IEEE 802.3x for flow control IEEE 802.3u for 100BaseT(X)

PoE Pinout	V+, V+, V-, V- for pins 1, 2, 3, 6 (Endspan, MDI, Mode A)			
Optical Fiber				

Switch Properties	
Packet Buffer Size	768 kbits
MAC Table Size	2 K
Processing Type	Store and Forward

Power Parameters	
Input Current	5.55 A @ 24 VDC
Connection	1 removable 4-contact terminal block(s)
Operating Voltage	12 to 57 VDC
Input Voltage	12/24/48 VDC, Redundant dual inputs
Power Budget	Max. 120 W for total PD consumption Max. 30 W for each PoE port
Power Consumption (Max.)	Max. 13.2 W full loading without PDs' consumption
Reverse Polarity Protection	Supported
Overload Current Protection	Supported

Physical Characteristics	
Housing	Metal
IP Rating	IP30
Dimensions	50.3 x 114 x 70 mm (1.98 x 4.53 x 2.76 in)
Weight	375 g (0.83 lb)
Installation	DIN-rail mounting, Wall mounting (with optional kit)

Environmental Limits

Operating Temperature	Standard Models: -10 to 60°C (14 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMI	CISPR 32, FCC Part 15B Class A
EMC	EN 55032/24
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Safety	UL 508

MTBF

Time	1,398,743 hrs
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x EDS-P206A Series switch
Installation Kit	4 x cap, plastic, for RJ45 port
Documentation	1 x quick installation guide 1 x warranty card

Dimensions

Unit: mm (inch)

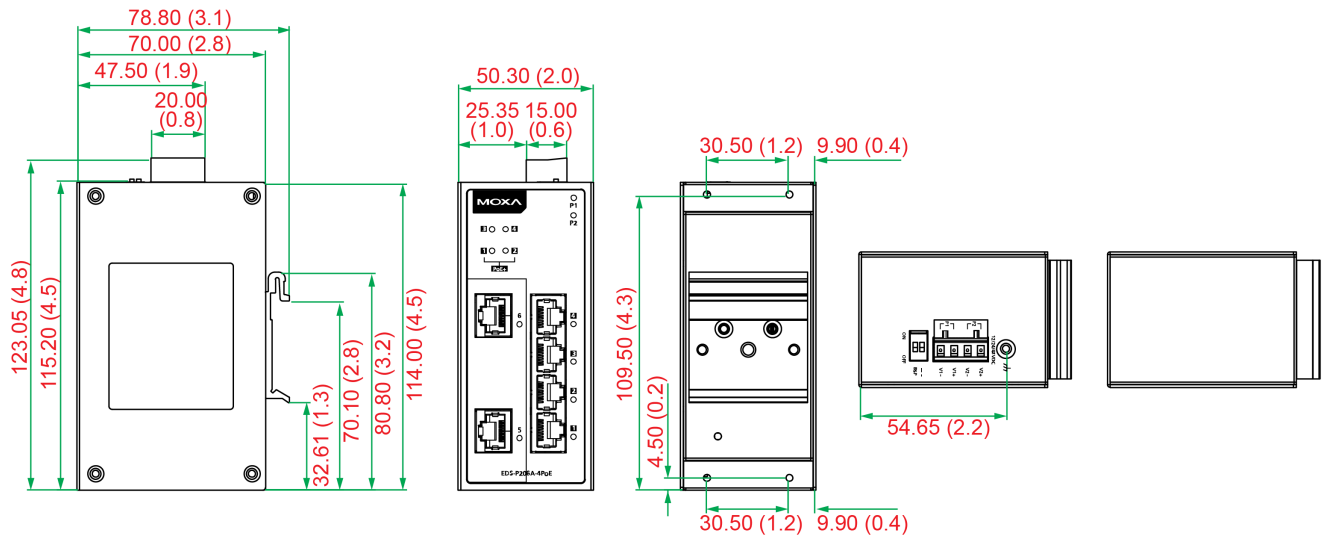

Side View

Front View

Rear View

Top and Bottom Views

Ordering Information

Model Name	10/100BaseT(X) Ports RJ45 Connector	PoE Ports, 10/ 100BaseT(X) RJ45 Connector	100BaseFX Ports Multi-Mode, SC Connector	100BaseFX Ports Multi-Mode, ST Connector	100BaseFX Ports Single-Mode, SC Connector	Operating Temp.
EDS-P206A-4PoE	2	4	–	–	–	-10 to 60°C
EDS-P206A-4PoE-T	2	4	–	–	–	-40 to 75°C
EDS-P206A-4PoE-M-SC	1	4	1	–	–	-10 to 60°C
EDS-P206A-4PoE-M-SC-T	1	4	1	–	–	-40 to 75°C
EDS-P206A-4PoE-M-ST	1	4	–	1	–	-10 to 60°C
EDS-P206A-4PoE-M-ST-T	1	4	–	1	–	-40 to 75°C
EDS-P206A-4PoE-MM-SC	–	4	2	–	–	-10 to 60°C
EDS-P206A-4PoE-MM-SC-T	–	4	2	–	–	-40 to 75°C
EDS-P206A-4PoE-MM-ST	–	4	–	2	–	-10 to 60°C
EDS-P206A-4PoE-MM-ST-T	–	4	–	2	–	-40 to 75°C
EDS-P206A-4PoE-S-SC	1	4	–	–	1	-10 to 60°C
EDS-P206A-4PoE-S-SC-T	1	4	–	–	1	-40 to 75°C
EDS-P206A-4PoE-SS-SC	–	4	–	–	2	-10 to 60°C
EDS-P206A-4PoE-SS-SC-T	–	4	–	–	2	-40 to 75°C

Accessories (sold separately)

Power Supplies

DR-120-24	120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature
DR-75-24	75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature
DR-120-48	120W/2.5A DIN-rail 48 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature
DR-75-48	75W/1.6A DIN-rail 48 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature
DRP-240-48	DIN-rail 48 VDC power supply with 240W/5A, 85 to 264 VAC, or 120 to 370 VDC input, -10 to 70°C operating temperature

Wall-Mounting Kits

WK-46	Wall-mounting kit, 2 plates, 8 screws, 46.5 x 66.8 x 1 mm
-------	---

Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.